


# Tannoy 3142 driver kit T12/I12

Stock code DWTA65

Nominal impedance	n/a
Minimum impedance	n/a
Maximum impedance	86.54
DC resistance	9.59
Voice coil inductance	2.51
Resonant frequency	63.93
Mechanical Q factor	4.858
Electrical Q factor	0.606
Total Q factor	0.538
F ratio	n/a
Efficiency factor %	1.35



OD	315
CD	265
MD	160
ID	185
FT	
NH - number of mounting holes	4
HH - hole to hole centre	320
Cm - cone material	PAPER

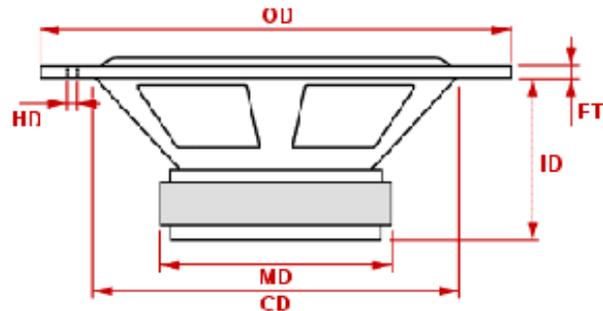

Mechanical resistance	n/a
Mechanical loss	n/a
Moving mass	74.91
Suspension compliance	0.08
Effective cone dia	260
Effective piston area	n/a
Equivalent volume VAS	32.75
Force factor	21.83
Reference sensitivity	93.39
Voice coil diameter	n/a
Voice coil length	n/a
Voice coil layers	n/a
Flux density gap	n/a
Total useful flux	n/a
Height of magnet gap	n/a
Diameter magnet	n/a
Height magnet	n/a
Weight magnet	n/a
IEC power handling	n/a
Max linear SPL	n/a
Xmax peak	n/a
Nominal power	n/a
Frequency range	n/a
Net weight	n/a
Recommended box volume	n/a
Recommended port diameter	n/a
Recommended port length	n/a

