


TANNOY®

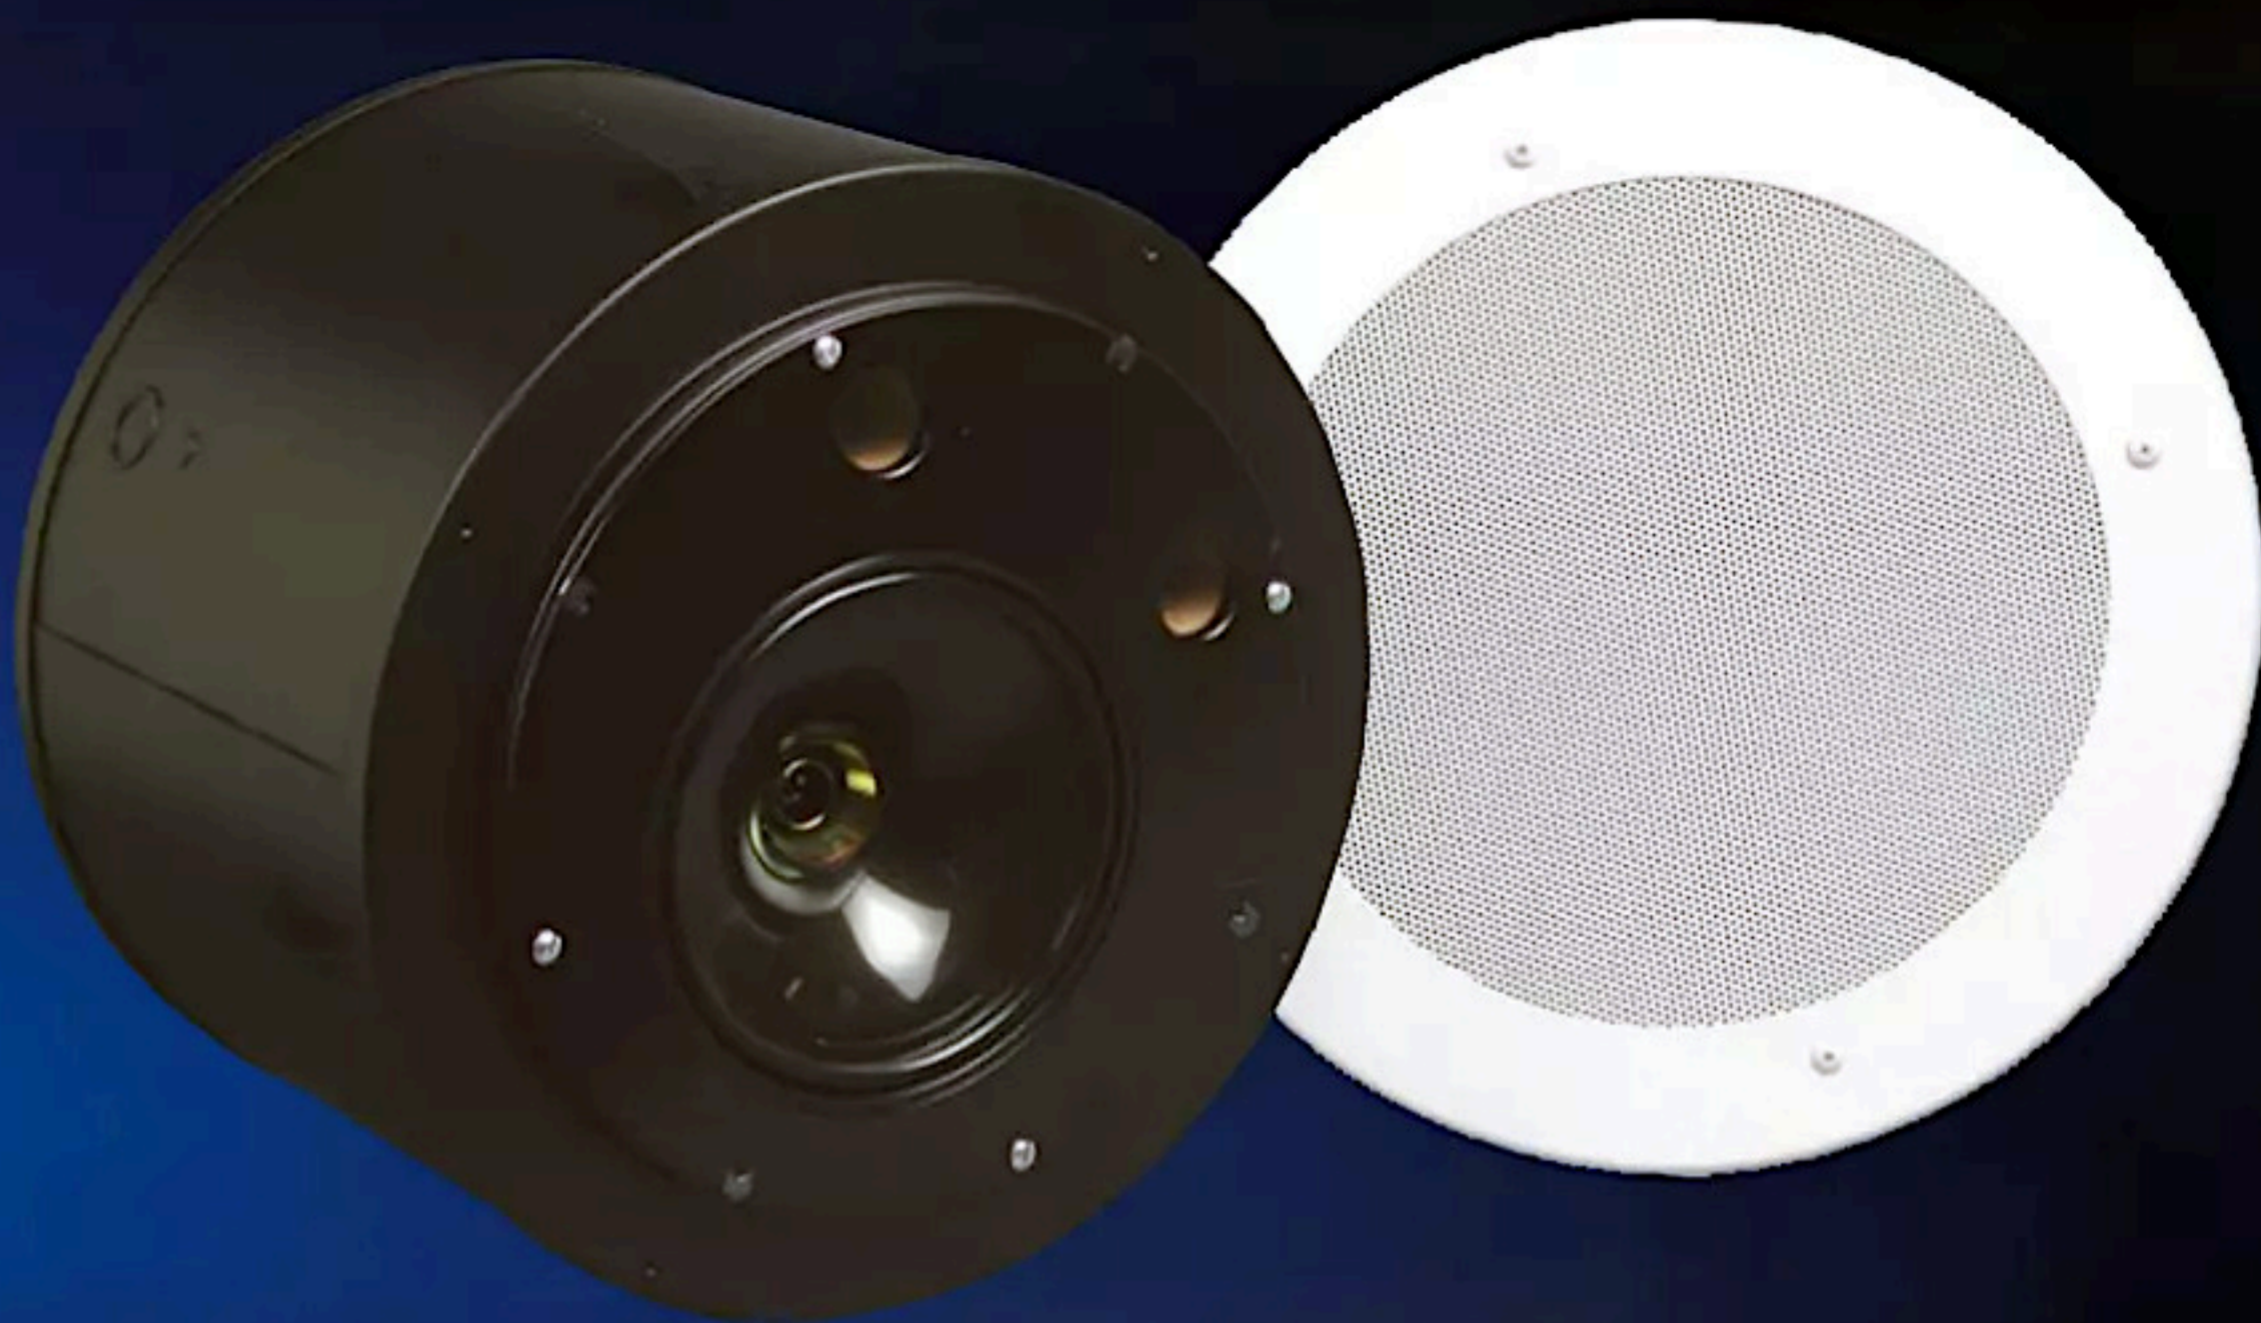

CMS8 TDC

The Tannoy CMS8 TDC is a premium quality ceiling monitor system based around a 203mm (8") point source, constant directivity Dual Concentric™ transducer.

The drive unit of the CMS8 TDC is the same drive unit used in Tannoy reference-quality studio monitors. It incorporates the latest generation design features including a dual magnet assembly, HF Tulip WaveGuide™ and an injection molded polypropylene LF cone. The high frequency (HF) and low frequency (LF) sources are coincidentally aligned to a point source. The result is a smooth, uniform frequency response over a wide area of coverage unachievable with discrete, two-way designs in the vertical plane where massive cancellations appear off axis at the crossover frequency.

The CMS8 TDC is designed for pre-mount applications. The can is pre-installed, so access to the ceiling cavity is required. The transformer settings (60, 30, 15, 7.5) are commissioned by connecting the input wire to the appropriate terminal during baffle installation.

The TEQ 880 and TEQ 880PL are optimally tuned enclosures: rubber coated, heavily damped back boxes that deliver superior low frequency extension. The TEQ 880 has knockouts for easy straight-through wiring, while the TEQ 880PL is sealed for installations requiring a plenum rated back box. The high quality, minimalist crossover network of the CMS8 TDC in conjunction with the THP 60 Watt transformer produces a high sensitivity, low loss system with wide, dynamic range.

The CMS8 TDC is available as the CMS8 TDC-8 for use in 8Ω operation and as the CMS8 TDC-60, supplied with a THP 60 Watt transformer.



CEILING MONITOR SYSTEMS
CEILING MONITOR SYSTEMS
CEILING MONITOR SYSTEMS
CEILING MONITOR SYSTEMS



CEILING MONITOR SYSTEMS

REAR DETAIL

ENCLOSURE DETAIL

BAFFLE INSTALLATION

DRIVER DETAIL

CMS8 TDC


SYSTEM

| | | |
|---|---------------------------------|------------------------------|
| System Type | Ceiling Monitor Loudspeaker | |
| Frequency Response +/- 3dB ⁽¹⁾ | | 47Hz - 20kHz |
| | -10dB | 37Hz |
| Recommended Amplifier Power | 20 - 180 Watt / 8Ω | |
| Power Handling ⁽²⁾ | Average Programme | 90 Watt |
| | Peak | 180 Watt |
| | | 360 Watt |
| Sensitivity 2.83 Volts @ 1 meter ⁽³⁾ | 94dB (half space) | |
| Maximum SPL | THP 60 Transformer | 111dB (average) |
| | Low Impedance | 113dB (average) 119dB (peak) |
| Impedance | Nominal | 8Ω |
| Wattage Tap Selections | 60, 30, 15, 7.5 Watts | |
| Dispersion | See Beamwidth Plot | 90° Conical |
| Driver Complement | 1 x 203mm (8") Dual Concentric™ | |
| Crossover | 2kHz - passive | |


CONSTRUCTION

| | | |
|------------------------|----------------------------|--|
| Enclosure | 28 litres, vented | |
| Finish | White grille - paintable | |
| Connectors | TEQ 880PL | Rear accessible junction box |
| | TEQ 880 | Speed clip |
| Dimensions | Can Height | 257mm (10 1/8") |
| | Baffle Diameter | 300mm (11 7/8") |
| | Cutout Size | 305mm (12") |
| Weight (each) | CMS8 TDC-60 with TEQ 880PL | 9.2kg (20lbs 6oz) |
| Shipping | Quantity | 1 |
| | CMS8 TDC | 4.7kg (10lbs 5oz) |
| | CMS8 TDC-60 | 5.6kg (12lbs 6oz) |
| | Pack Dimensions | 178 x 368 x 368mm (7 x 14 1/2 x 14 1/2") |
| Accessories (Optional) | TRG 6/8 | Round Grille |
| | TSG 6/8 | Square Grille |
| | TTB 6/8 | Tile Bridge |
| | TEQ 880 | Back Can |
| | TEQ 880PL | Back Can - Plenum Rated |


SIDE & TOP ELEVATION

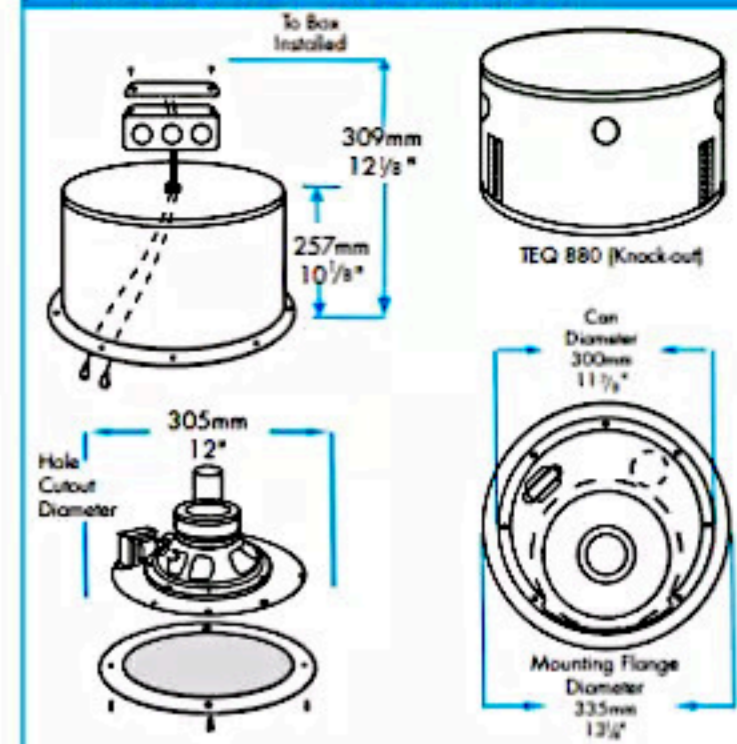

ACCESSORIES

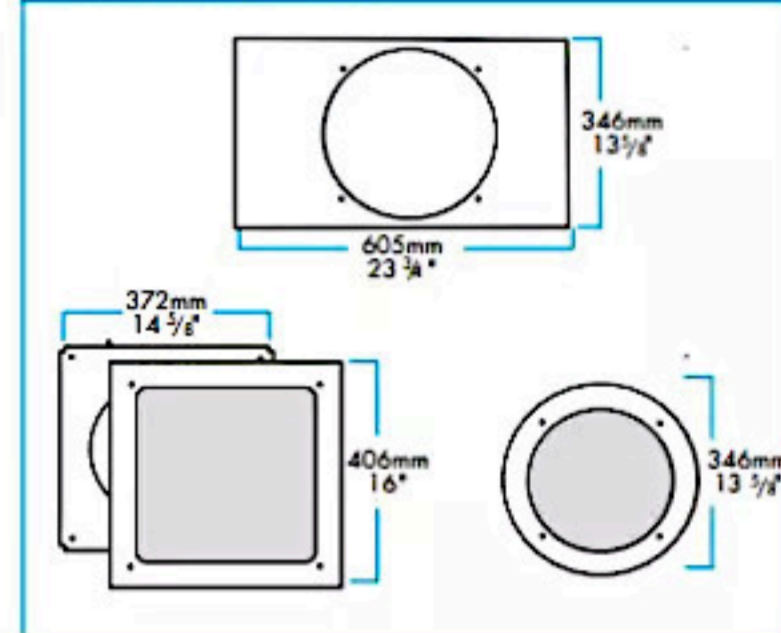

BEAMWIDTH PLOT

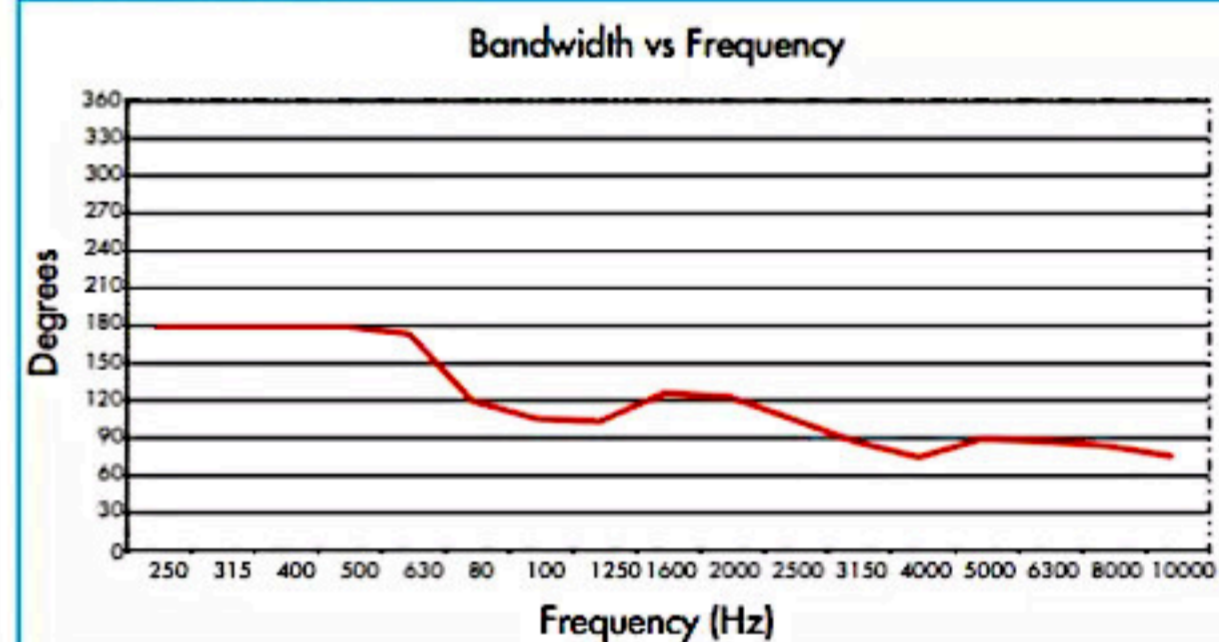

NOTES: ⁽¹⁾ Average over stated bandwidth. Measured at 1 meter on axis. ⁽²⁾ Long term power handling capacity as defined in EIA standard RS - 426A. ⁽³⁾ Unweighted pink noise input, measured at 1 meter in an anechoic chamber

A full range of measurements, performance data, and Ease™ Data can be downloaded from www.tannoy.com

Tannoy operates a policy of continuous research and development. The introduction of new materials or manufacturing methods will always equal or exceed the published specifications, which Tannoy reserves the right to alter without prior notice. Please verify the latest specifications when dealing with critical applications.

APPLICATIONS

- Foreground music & paging systems
- Public address systems
- Reception / waiting rooms
- Airports, convention centers, hotels
- Business music systems
- Boardrooms & offices
- Cruise ships
- Retail outlets
- Houses of worship
- Multi room stereo systems

FEATURES

- 8" point source Dual Concentric™ driver
- 90° controlled conical dispersion for optimum coverage and forward gain
- Low insertion loss, 60 Watt line transformer - for a more powerful and dynamic performance
- Optimally tuned enclosure for extended LF response
- Pre-mount back can - baffle installed separately
- Wide, constant directivity dispersion
- High sensitivity
- Magnetic fluid cooled HF
- Quick and easy installation
- Five year loudspeaker warranty

ARCHITECTURAL SPECIFICATIONS

The Ceiling Monitor system shall consist of a 203mm (8") full range, single point source Dual Concentric™ transducer; a cascaded first order high frequency; first order low frequency with positive acoustic polarity frequency dividing system.

The system shall be powered by the THP 60 high performance transformer offering 25 Volt, 70.7 Volt * and 100 Volt operation with 60,30,15,7.5 Watt taps available.

Performance of the ceiling monitor shall meet or exceed the following criteria: The system shall have a conical coverage pattern of 60° at 8kHz and 90° at 2kHz. Frequency response measured on axis shall be 47Hz to 20kHz +/- 3dB. Sensitivity shall be 94dB for 2.83 Volts @ 1 meter with minimal insertion loss accounted for.

The driver impedance and maximum power handling (without transformer) shall be 8Ω and 180 Watts respectively.

The enclosure shall be an optimally tuned, vented enclosure utilizing square grille, round grille and tile bridge options and shall not exceed the following dimensions: 257 x 300 mm or 10 1/8 x 11 7/8" (HxW) including back can.

The Ceiling Monitor System shall be the Tannoy...CMS8 TDC.

* 70 Volt Version only



Tannoy United Kingdom | T: +44 (0) 1236 420199 | F: +44 (0) 1236 428230 | E: enquiries@tannoy.com
 Tannoy North America | T: (519) 745 1158 | F: (519) 745 2364 | E: enquiries@tannoyna.com

tannoy.com